


PLAN
12", 15" OR 18" SLOTTED DRAINS

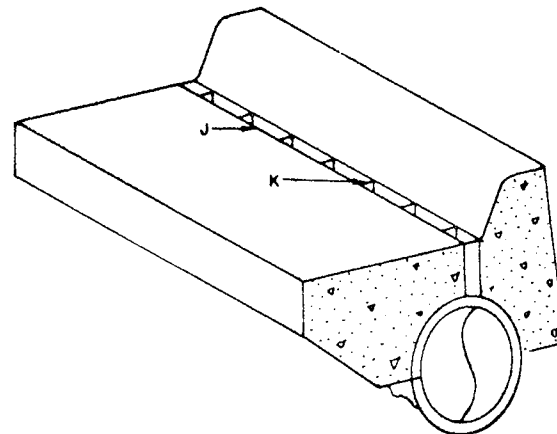


ISOMETRIC

GENERAL NOTES:


1. ALL FITTINGS TO BE COMPATIBLE WITH C.M.P.
2. SPECIAL END CAPS AS (MANUFACTURED BY ARMCO CORP. OR APPROVED EQUAL.) TO BE INSTALLED AT UPSTREAM ENDS OF DRAIN PIPE.
3. GRATE OPENING TO BE BLOCKED DURING CONSTRUCTION TO PREVENT DEBRIS FROM ENTERING DRAIN.

CONSTRUCTION NOTES:


- A. SURFACE CONFIGURATION TO CONFORM WITH STANDARD CURB & GUTTER.
- B. TOE OF GUTTER.
- C. STANDARD CITY CURB & GUTTER AS SPECIFIED ON PLANS.
- D. PAVEMENT.
- E. SLOTTED DRAIN AS MANUFACTURED BY ARMCO CORP. OR APPROVED EQUAL.
- F. SUB BASE MATERIAL COMPACTED TO 95% MODIFIED PROCTOR.
- G. UNDISTURBED EARTH.
- H. BACK OF CURB.
- J. GRATE AT FLOW LINE.
- K. SOLID WEB SPACERS AT 6" O.C.

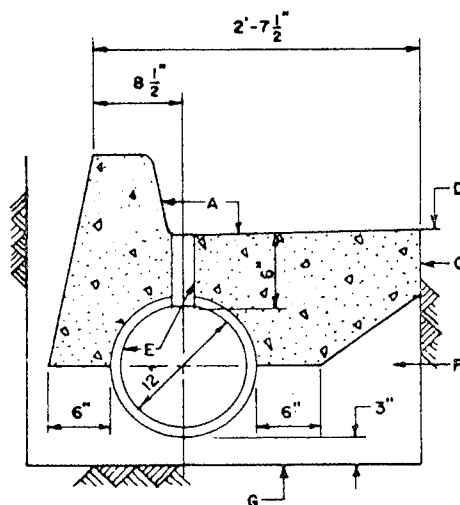

12" PIPE

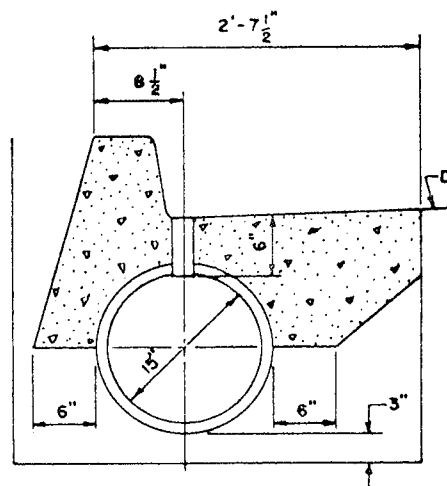

15" PIPE

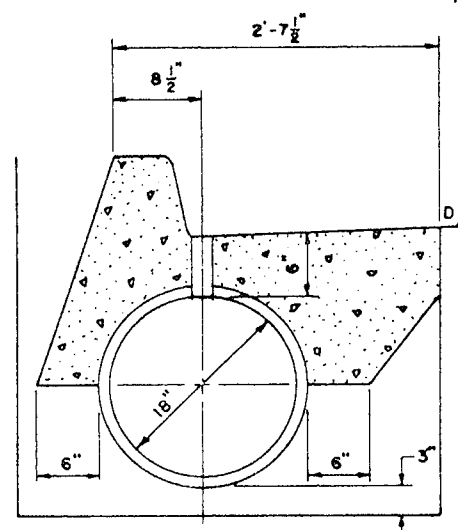

18" PIPE

SECTIONS A-A

REVISIONS

CITY OF ALBUQUERQUE

DRAINAGE

SLOTTED DRAIN

DWG. 2225

AUG 1966